

ANTENNA CORD SUB-ASSY REPLACEMENT

670E1-01

HINT:

COMPONENTS: See page 67-2

1. REMOVE ROOF HEADLINING ASSY (See page 76-17)

HINT:

Refer to the instructions for removal of the roof headlining assy.

2. REMOVE ANTENNA CORD SUB-ASSY


(a) Remove the antenna cord sub-assy from the roof headlining assy.

3. INSTALL ANTENNA CORD SUB-ASSY

(a) Tape the antenna cord sub-assy at the position of the roof headlining assy shown in the illustration.

NOTICE:

- The antenna cord sub-assy should come to the center of the tape (100 mm (3.94 in.) x 25 mm (0.98 in.)) when taped.
- Try not to touch the adhesive side of the tape when taping.

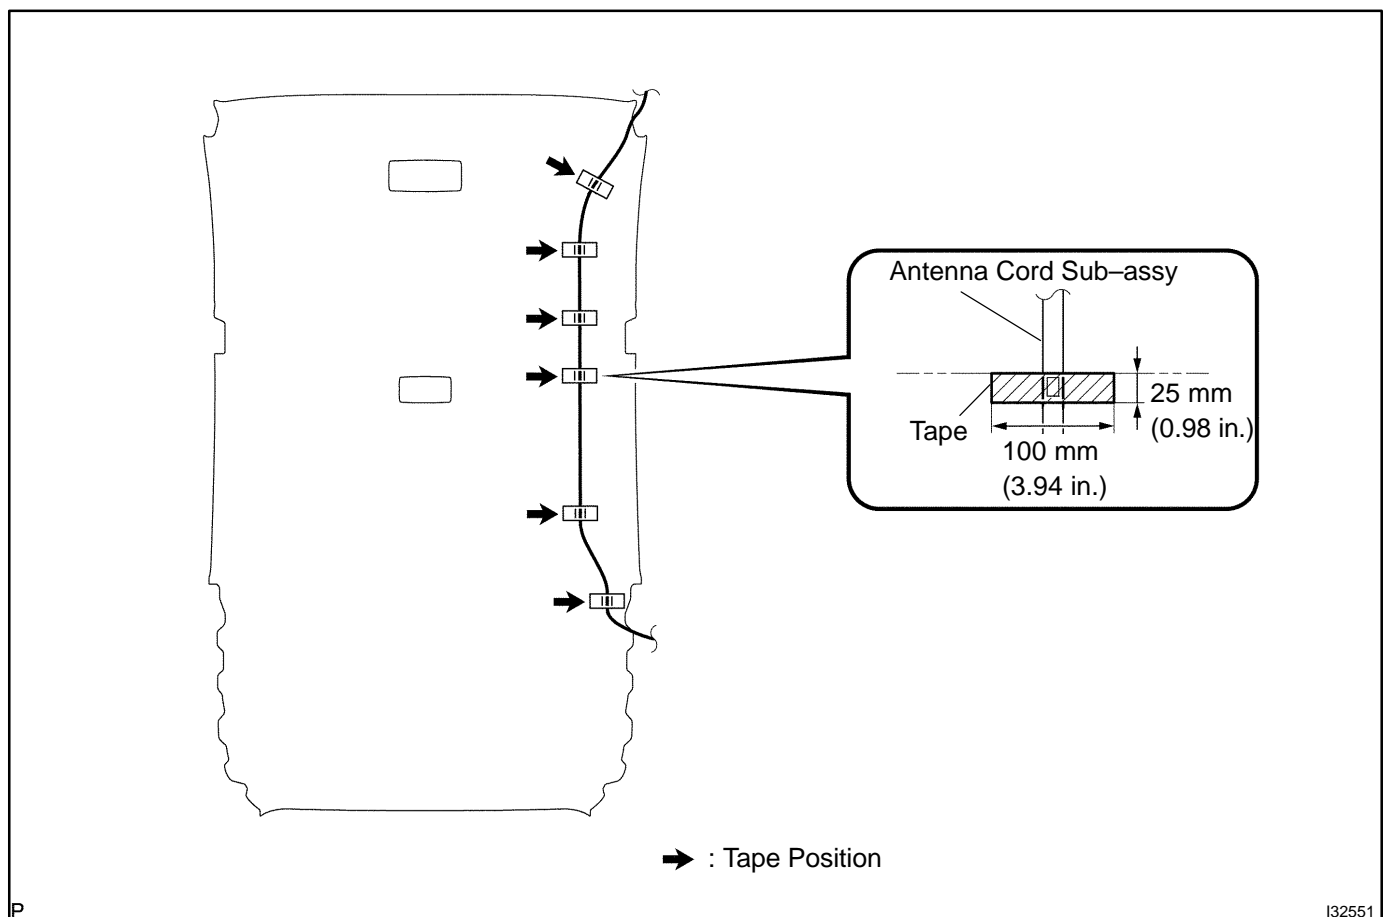

P

I32551

4. **INSTALL ROOF HEADLINING ASSY (See page 76-17)**
5. **INSTALL REAR SEAT CUSHION ASSY AND REAR SEAT BACK ASSY (See page 72-10)**