

# AMPLIFIER ANTENNA ASSY REPLACEMENT

670EJ-01

HINT:


COMPONENTS: See page 67-2

1. REMOVE ROOF ANTENNA POLE SUB-ASSY (See page 67-18)

2. REMOVE ROOF HEADLINING ASSY (See page 76-17)


HINT:

Refer to the instructions for removal of the roof headlining assy.

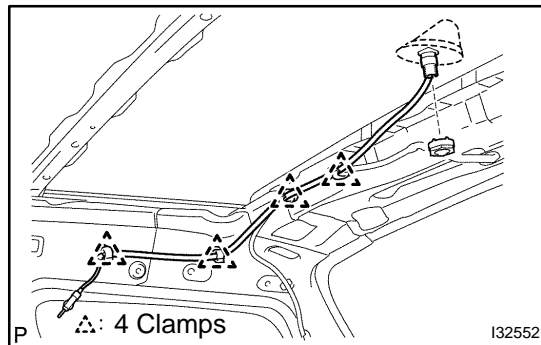


3. REMOVE AMPLIFIER ANTENNA ASSY

(a) Remove the 4 clamps and antenna nut.

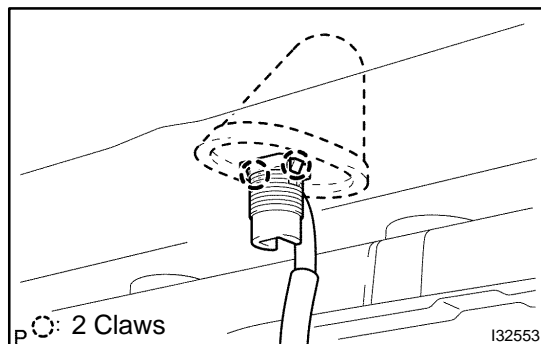


(b) Release the 2 fitting claws, remove the amplifier antenna assy.

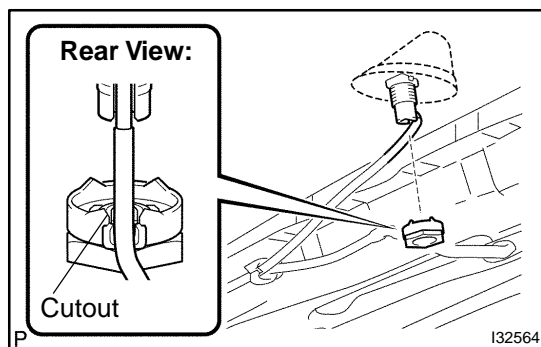

4. INSTALL AMPLIFIER ANTENNA ASSY

(a) Set the amplifier antenna assy to the hole on the roof, and place the antenna cord on the cutout on the antenna nut.

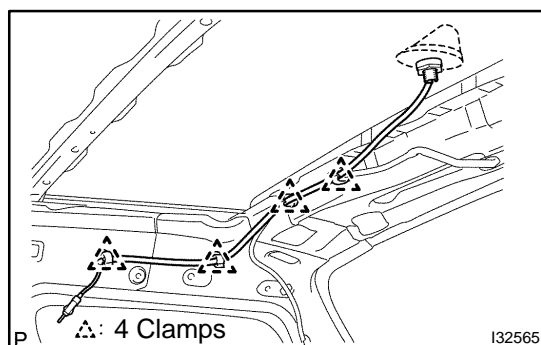

(b) Install the amplifier antenna assy with the antenna nut.

**Torque: 4.5 N·m (46 kgf·cm, 40 in·lbf)**

(c) Install the 4 clamps.

5. **INSTALL ROOF HEADLINING ASSY (See page 76-17)**
6. **INSTALL REAR SEAT CUSHION ASSY AND REAR SEAT BACK ASSY (See page 72-10)**