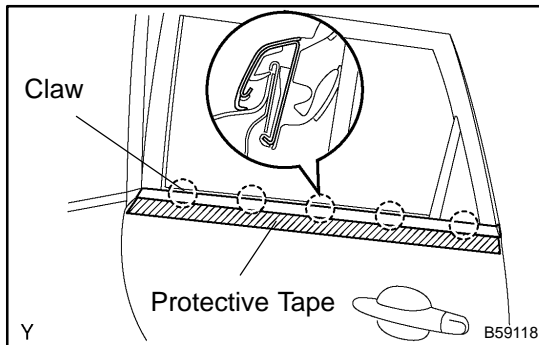


REAR DOOR BELT MOULDING ASSY LH REPLACEMENT

760II-01

HINT:

- Installation is in the reverse order of the removal. But the installation is indicated only when it has a point.
- In the RH side, work in the same procedure as in the LH side.

**1. REMOVE REAR DOOR BELT MOULDING ASSY LH**

- (a) Put protective tape under the rear door belt moulding.
- (b) Using a moulding remover or scraper, remove the rear door belt moulding.

HINT:

Tape the scraper tip before use.